

Bleeding the Fuel System


A completely bled fuel system is imperative for perfect engine operation. During operation, the system is continuously bled via the over-flow line.

The entire system must be bled manually after the fuel tank has been driven completely empty.

Note:

Disengage primer pump handle prior to operating it (turn counterclockwise). Retighten after use.

First, fill fuel tank with fuel. Then operate primer pump until the bypass valve on the injection pump opens (hissing noise).

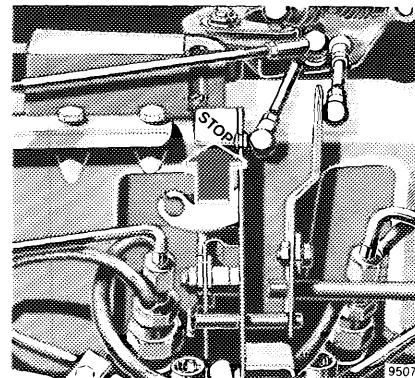

Turning off Engine Manually

If the engine continues operating in steering lock position "0", open hood and press lever marked "STOP" until the engine stops.

